

Grapples


Timber | LX & MT range



- Wear resistant grab tines made from high strength steel
- Line-bored to ensure reliable interchangeability of components
- Heavy duty oversized tag locking chrome pins and ceramic coated steel bushes
- Lighter, more durable design incorporating high strength components for longer life and minimum down time


BELL

LX GRAPPLES: Loggers and Cranes

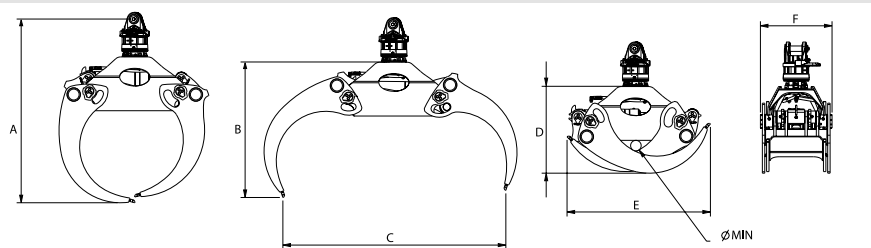

Model	Tip-Tip Area	A	B	C	D	E	F	ØMin	Max operating Pressure	Weight	Indexator Model
	m ²	mm	mm	mm	mm	mm	mm	mm	BAR	kg	
36LX	0,35	1316	823	1630	625	948	448	106	160	222	GV12S
42LX	0,41	1399	893	1783	669	1040	448	111	160	247	GV12S

MT GRAPPLES: Excavators and large Knuckleboom Cranes

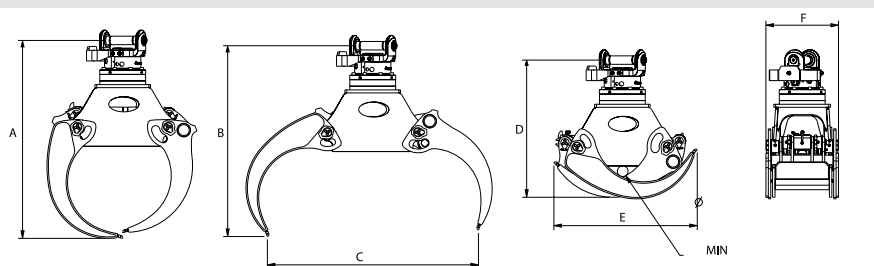

Model	Tip-Tip Area	A	B	C	D	E	F	ØMin	Max operating Pressure	Weight	Indexator Model	Typical Carrier size (but not limited to)
	m ²	mm	mm	mm	mm	mm	mm	mm	BAR	kg		ton
MT500 LB	0,5	1549	1453	1843	1051	1196	560	90	250	430	GV12/17	7-14
MT600 LB	0,6	1620	1460	2139	1100	1302	660	113	250	531	GV12/17	14-20
MT800 LB	0,8	1812	1587	2472	1170	1467	560	114	250	561	GV12/17	20-26
MT501	0,5	1637	1578	1843	1151	1184	600	90	250	800	XR350	7-14
MT601	0,6	1754	1593	2139	1237	1300	600	110	250	915	XR350	14-20
MT801	0,8	1896	1700	2472	1292	1496	600	120	250	998	XR350	20-26
MT1000	1,0	1717	1468	2851	1054	1673	815	135	250	1125	XR400	26-30
MT1200	1,2	1832	1637	2936	1078	1825	815	116	250	1310	XR400	26-30
MT1800	1,8	2217	1952	3490	1546	2197	829	147	250	1489	IR22	30-38
MT2250	2,25	2517	2065	4493	1456	2522	875	176	250	2426	XR500	38-52

Technical specifications and designs may vary according to options available from time to time. With our policy of continuous improvement we reserve the right to change details without prior notice. Photographs, diagrams & drawings featured in this brochure may include optional equipment.

BELL INTERNATIONAL: Tel: +27 (0)35-907 9431

E-mail: marketing@bellequipment.com

Web: www.bellequipment.com



Tel: +61 (0)8 9355 2442



Tel: +49 (0)6631 / 91 13 0



Tel: +27 (0)11 928 9700



Tel: +33 (0)5 55 89 23 56



Tel: +44 (0)1283 712862



Tel: +1 (704) 655 2802

**Strong Reliable Machines
Strong Reliable Support**

