

B40E Articulated Dump Truck


ENGINE Manufacturer Mercedes Benz (MTU) Model OM471LA (MTU 6R 1300) Configuration Inline 6, turbocharged and intercooled Maximum Net Power 380 kW (510 hp) @ 1 600 rpm in accordance with UN ECE R120 Gross Torque 2 600 Nm (1 918 lbf) @ 1 300 rpm Displacement 12,8 litres (781 cu.in) Auxiliary Brake Jacobs Engine Brake® Fuel Tank Capacity 533 litres (140.8 US gal) Certification OM471LA (MTU 6R 1300) is EU Stage IIIA / EPA Tier 3 emission level equivalent	TRANSFER CASE Manufacturer Kessler Series W2400 Layout Remote mounted Gear Layout Three in-line helical gears Output Differential Interaxle 29/71 proportional differential. Automatic inter-axle differential lock.	WHEELS Type Radial Earthmover Tyre 29.5 R 25 (875/65 R 29 optional)	DUMPING SYSTEM Two double-acting, single stage, dump cylinders Raise Time 12 seconds Lowering Time 11 seconds Tipping Angle 70 deg standard, or any lower angle programmable																								
TRANSMISSION Manufacturer Allison Model 4700 ORS Configuration Fully automatic planetary transmission Layout Engine mounted Gear Layout Constant meshing planetary gears, clutch operated Gears 7 Forward, 1 reverse Clutch Type Hydraulically operated multi-disc Control Type Electronic Torque Control Hydrodynamic with lock-up in all gears	AXLES Manufacturer Bell Model 30T Differential High input controlled traction differential with spiral bevel gears Final Drive Outboard heavy duty planetary on all axles	FRONT SUSPENSION Semi-independent, leading A-frame supported by hydro-pneumatic suspension struts REAR SUSPENSION Pivoting walking beams with laminated rubber suspension blocks HYDRAULIC SYSTEM Full load sensing system serving the prioritised steering, body tipping and brake functions. A ground-driven, load sensing emergency steering pump is integrated into the main system.	PNEUMATIC SYSTEM Air drier with heater and integral unloader valve, serving park brake and auxiliary functions ELECTRICAL SYSTEM Voltage 24 V Battery Type Two AGM (Absorption Glass Mat) type Battery Capacity 2 X 75 Ah Alternator Rating 28 V 100 A																								
	BRAKING SYSTEM Service Brake Dual circuit, full hydraulic actuation wet disc brakes on front and middle axles. Wet brake oil is circulated through a filtration and cooling system. Park & Emergency Spring applied, air released driveline mounted disc Auxiliary Brake Jacobs Engine Brake®. Automatic retardation through electronic activation of wet brake system.	REAR SUSPENSION Optional passive dual-springrate Comfort Ride walking beam available.	MAX. VEHICLE SPEED <table border="1"> <tr><td>1st</td><td>4 km/h</td><td>2,5 mph</td></tr> <tr><td>2nd</td><td>9 km/h</td><td>6 mph</td></tr> <tr><td>3rd</td><td>17 km/h</td><td>11 mph</td></tr> <tr><td>4th</td><td>23 km/h</td><td>14 mph</td></tr> <tr><td>5th</td><td>33 km/h</td><td>21 mph</td></tr> <tr><td>6th</td><td>44 km/h</td><td>27,3 mph</td></tr> <tr><td>7th</td><td>51 km/h</td><td>32 mph</td></tr> <tr><td>R</td><td>7 km/h</td><td>4 mph</td></tr> </table>	1st	4 km/h	2,5 mph	2nd	9 km/h	6 mph	3rd	17 km/h	11 mph	4th	23 km/h	14 mph	5th	33 km/h	21 mph	6th	44 km/h	27,3 mph	7th	51 km/h	32 mph	R	7 km/h	4 mph
1st	4 km/h	2,5 mph																									
2nd	9 km/h	6 mph																									
3rd	17 km/h	11 mph																									
4th	23 km/h	14 mph																									
5th	33 km/h	21 mph																									
6th	44 km/h	27,3 mph																									
7th	51 km/h	32 mph																									
R	7 km/h	4 mph																									
	Total Retardation Power Continuous: 442 kW (593 hp) Maximum: 854 kW (1 145 hp)	STEERING SYSTEM Double acting cylinders, with ground-driven emergency steering pump Lock to lock turns 4,5 Steering Angle 42°	CAB ROPS/FOPS certified 77 dBA internal sound pressure measured according to ISO 6396																								

Load Capacity & Ground Pressure

OPERATING WEIGHTS*		GROUND PRESSURE**				LOAD CAPACITY		OPTION WEIGHTS	
UNLADEN	kg (lb)	LADEN				BODY	m³ (yd³)		kg (lb)
Front	16 816 (37 079)	No sinkage/Total Contact Area (as recommended by tyre manufacturer)	Calculation method used by competition	Struck Capacity		19 (25)	Bin liner	1 369 (3 018)	
Middle	8 997 (19 837)			SAE 2:1 Capacity		24 (31)	Tailgate	1 002 (2 209)	
Rear	8 784 (19 368)	29.5 R 25	kPa (Psi)	29.5 R 25	kPa (Psi)	SAE 1:1 Capacity	28,5 (37)	875/65 R29	
Total	34 596 (76 284)	Front	310 (45)	Front	151 (21,9)	SAE 2:1 Capacity with Tailgate	24,5 (32)	(per vehicle) Add	1 338 (2 950)
LADEN		Mid/Rear	367 (53,2)	Mid/Rear	169 (24,5)			EXTRA WHEELSET	
Front	21 691 (47 828)							29.5 R 25	
Middle	26 059 (57 460)	875/65 R29		875/65 R29		Rated Payload	39 000 kg	(per vehicle) Add	516 (1 138)
Rear	25 846 (56 990)	Front	293 (42,5)	Front	131 (19)		(85 995 lb)	875/65 R29	
Total	73 596 (1 62 279)	Mid/Rear	329 (47,7)	Mid/Rear	149 (21,6)			(per vehicle) Add	1 338 (2 950)

* Includes additional equipment. ** 29.5R25 Groundpressures calculated with Michelin XADN+ Tyre. 875/65R29 Groundpressures calculated with Michelin XAD65-1 Tyre.

Dimensions

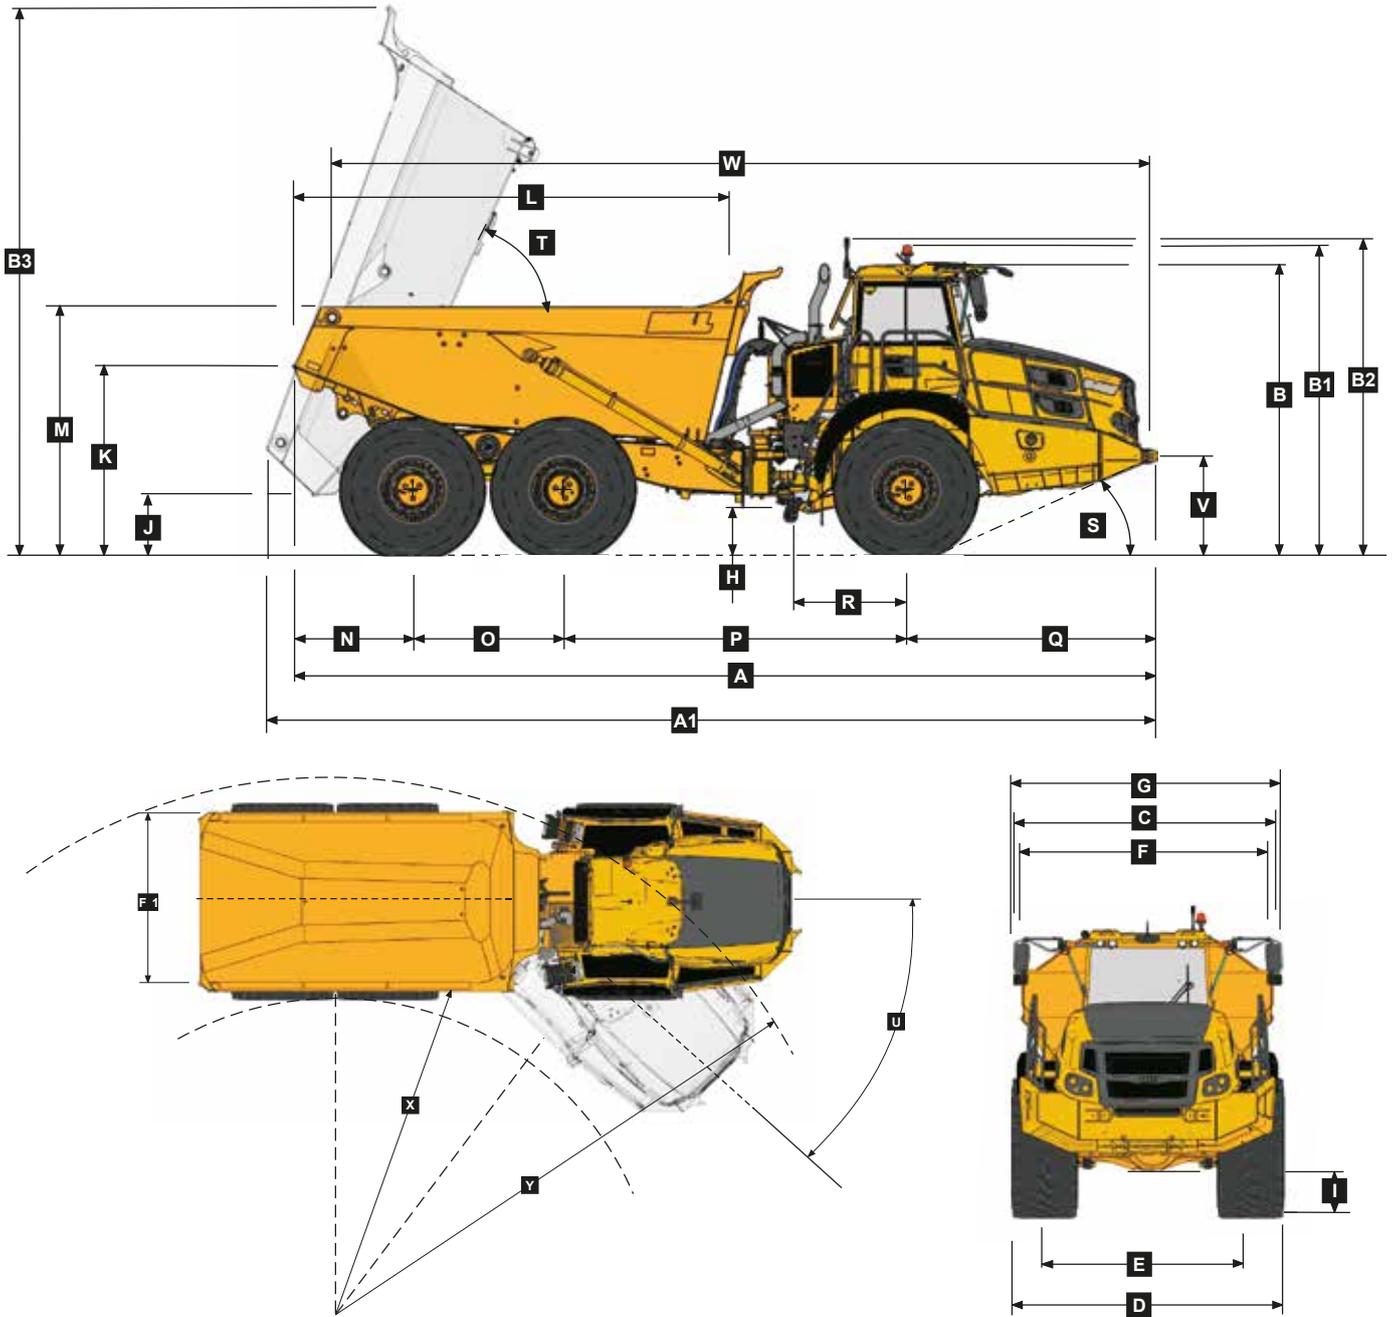


Machine Dimensions


A	Length - Transport Position with Tailgate	11 197 mm (36 ft. 9 in.)	K	Bin Lip Height - Transport Position	2 519 mm (8 ft. 3 in.)
A	Length - Transport Position w/o Tailgate	11 186 mm (36 ft. 8 in.)	L	Bin Length	5 742 mm (18 ft. 10 in.)
A1	Length - Bin Fully Tipped	11 742 mm (38 ft. 6 in.)	M	Load over Height	3 271 mm (10 ft. 9 in.)
B	Height - Transport Position	3 804 mm (12 ft. 6 in.)	N	Rear Axle Centre to Bin Rear	1 543 mm (5 ft.)
B1	Height - Rotating Beacon	4 040 mm (13 ft. 3 in.)	O	Mid Axle Centre to Rear Axle Centre	1 950 mm (6 ft. 5 in.)
B2	Height - Load Light	4 129 mm (13 ft. 7 in.)	P	Mid Axle Centre to Front Axle Centre	4 438 mm (14 ft. 7 in.)
B3	Bin Height - Fully Tipped	7 316 mm (24 ft.)	Q	Front Axle Centre to Machine Front	3 255 mm (10 ft. 8 in.)
C	Width over Mudguards	3 495 mm (11 ft. 6 in.)	R	Front Axle Centre to Artic Centre	1 558 mm (5 ft. 1 in.)
D	Width over Tyres - 875/65 R29	3 656 mm (12 ft.)	S	Approach Angle	24°
D	Width over Tyres - 29.5R25	3 487 mm (11 ft. 5 in.)	T	Maximum Bin Tip Angle	70°
E	Tyre Track Width - 875/65 R29	2 773 mm (9 ft. 1 in.)	U	Maximum Articulation Angle	42°
E	Tyre Track Width - 29.5R25	2 725 mm (8 ft. 11 in.)	V	Front Tie Down Height	1 265 mm (4 ft. 2 in.)
F	Width over Bin	3 372 mm (11 ft.)	W	Machine Lifting Centres	10 594 mm (34 ft. 9 in.)
F1	Width over Tailgate	3 662 mm (12 ft.)	X	Inner Turning Circle Radius - 875/65 R29	4 782 mm (15 ft. 8 in.)
G	Width over Mirrors - Operating Position	3 614 mm (11 ft. 10 in.)	X	Inner Turning Circle Radius - 29.5R25	4 866 mm (16 ft.)
H	Ground Clearance - Artic	545 mm (21.46 in.)	Y	Outer Turning Circle Radius - 875/65 R29	9 320 mm (30 ft. 7 in.)
I	Ground Clearance - Front Axle	545 mm (21.46 in.)	Y	Outer Turning Circle Radius - 29.5R25	9 235 mm (30 ft. 4 in.)
J	Ground Clearance - Bin Fully Tipped	876 mm (34.5 in.)			

Gradeability/Rimpull

1. Determine tractive resistance by finding intersection of vehicle mass line and grade line. NOTE: 2% typical rolling resistance is already assumed in chart and grade line.
2. From this intersection, move straight right across charts until line intersects rimpull curve.
3. Read down from this point to determine maximum speed attained at that tractive resistance.

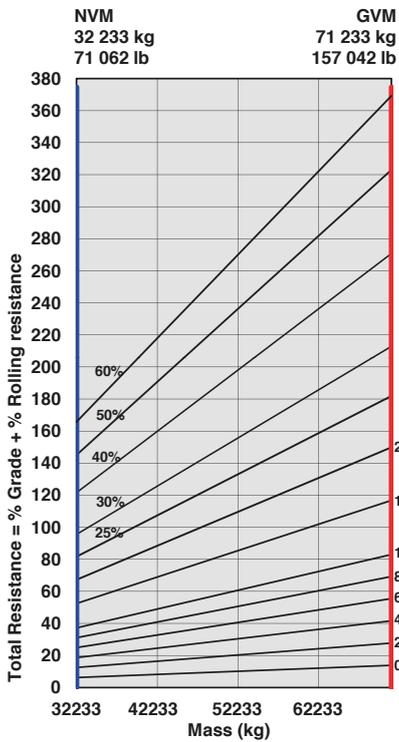


ADT, B40E 6X6 - Tractive Effort

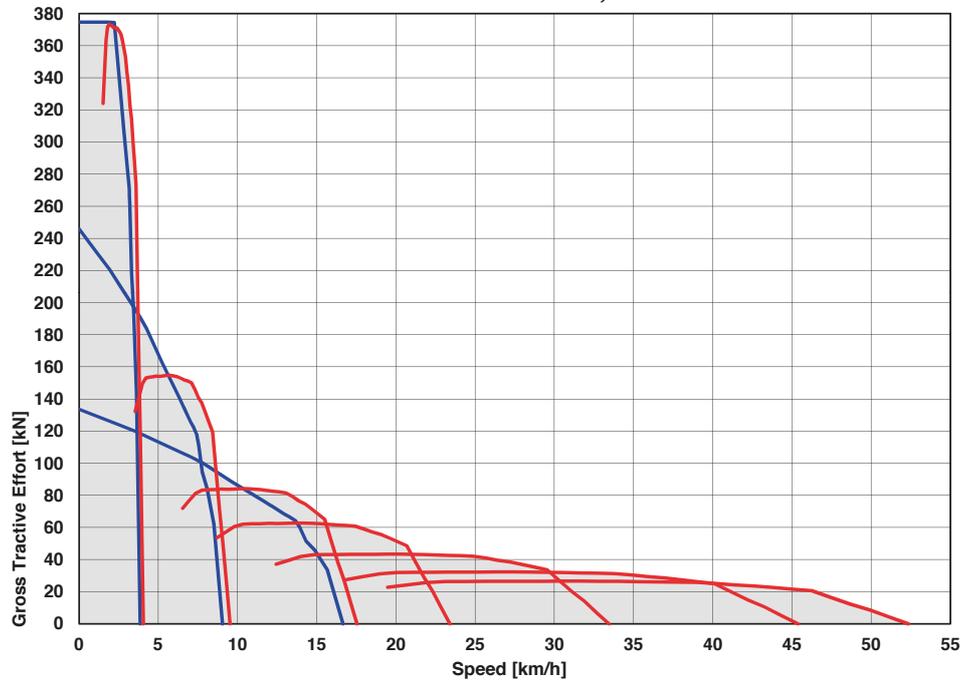


Retardation

1. Determine retardation force required by finding intersection of vehicle mass line.
2. From this intersection, move straight right across charts until line intersects the curve. NOTE: 2% typical rolling resistance is already assumed in chart.
3. Read down from this point to determine maximum speed.

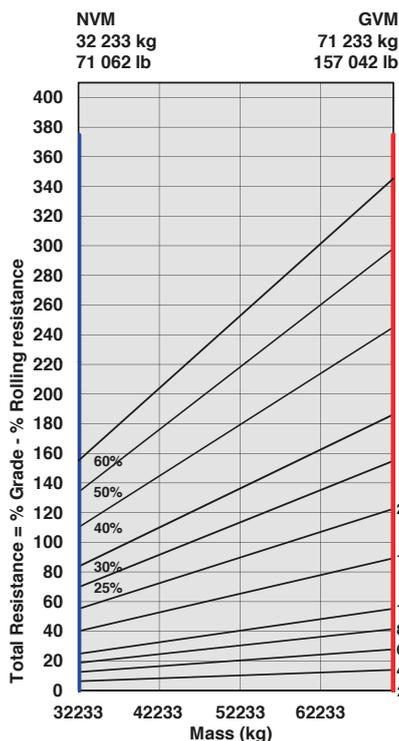

ADT, B40E 6X6 - Retardation

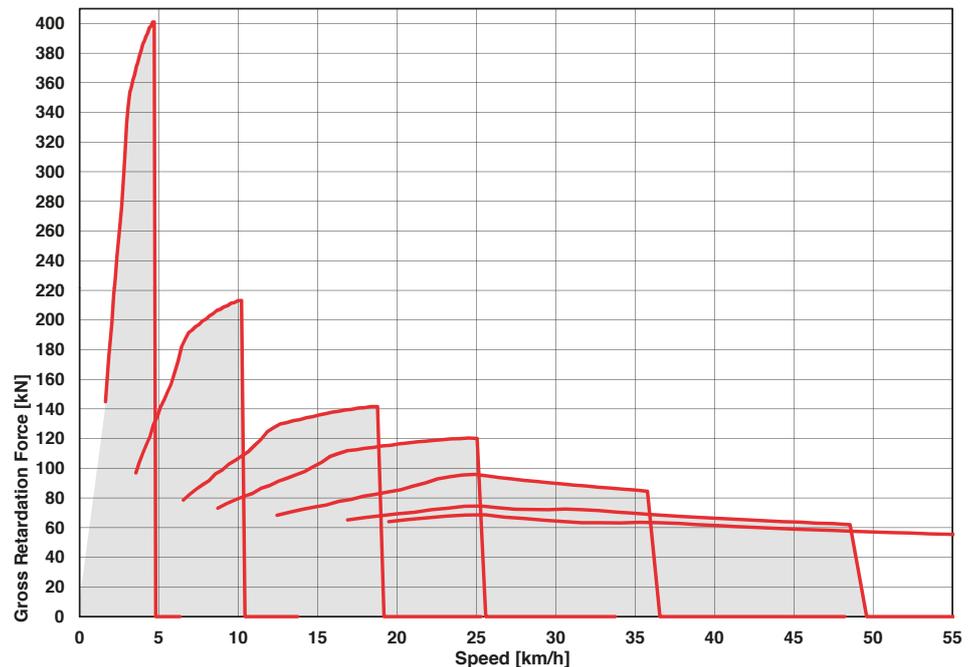

B40E	B45E	B50E	
			ENGINE
●	●	●	Jacobs Brake Engine®
●	●	●	Dual element air cleaner with dust ejector valve
●	●	●	Precleaner with automatic dust scavenging
●	●	●	Water separator
●	●	●	Serpentine drive belt with automatic tensioner
●	●	●	Provision for fast fill
●	●	●	Wet-sleeve cylinder liners
			COOLING
●	●	●	Crankshaft mounted electronically controlled viscous fan drive
●	●	●	Fan guard
			PNEUMATIC SYSTEM
●	●	●	Engine-mounted compressor
●	●	●	Air drier with heater
●	●	●	Integral unloader valve
			ELECTRICAL SYSTEM
▲	▲	▲	PDS Hardware as an option
●	●	●	Battery disconnect
●	●	●	Drive lights
▲	▲	▲	LED Drive lights
●	●	●	Air horn
●	●	●	Reverse alarm
▲	▲	▲	White noise reverse alarm
●	●	●	LED reverse lights
●	●	●	Rotating beacon
●	●	●	Pitch Roll Sensor
●	●	●	Halogen Artic reverse light
▲	▲	▲	LED Artic reverse light
			STEERING SYSTEM
●	●	●	Unidirectional pump
▲	▲	▲	Bi-directional ground-driven secondary steering pump
			CAB
●	●	●	ROPS/FOPS certification
●	●	●	Tilt cab
●	●	●	Gas strut-supported door
●	●	●	I-Tip programmable dump-body tip settings
●	●	●	HVAC semi-climate control system
▲	▲	▲	AM/FM radio with Aux + USB
●	●	●	Rear window guard
●	●	●	Wiper/washer with intermittent control
●	●	●	Tilt and telescoping steering wheel
●	●	●	Centre-mount air-suspension seat
●	●	●	Halogen work lights
▲	▲	▲	LED work lights
▲	▲	▲	Rotating beacon: seat belt installation
▲	▲	▲	Remote engine and machine isolation
●	●	●	Remote battery jump start
●	●	●	Retractable 3-point seat belt
●	●	●	Foldaway trainer seat with retractable seat belt
●	●	●	12-volt power outlet
●	●	●	Cab utility bin (removable)
●	●	●	Cup holder
●	●	●	Cooled/heated lunch box

B40E	B45E	B50E	
			CAB (continued)
●	●	●	Manually adjusted mirrors
●	●	●	Electrically adjusted and heated mirrors
●	●	●	Deluxe 10" colour LCD: Speedometer / Fuel gauge / Transmission oil temperature gauge / Engine coolant temperature gauge / LED function/warning indicators and audible alarm / Transmission gear selection / Tachometer / Battery voltage / Hour meter / Odometer / Fuel consumption / Tip counter / Trip timer / Trip distance / Metric/English units / Service codes/diagnostics
●	●	●	Backlit sealed switch module functions with: Wiper control / Lights / Heated mirrors / Retarding aggressiveness / Transfer case differential lock / Transmission gear hold / Dump-body tip limit / Automatic dump-body tip settings / Airconditioner/ Heater controls / Preselected Speed Control
			DUMP BODY
●	●	●	Dump body mechanical locks (x2). Partially up and fully up
▲	▲	▲	Body liner
▲	▲	▲	Tailgate
▲	▲	▲	Body heater
▲	▲	▲	Less dump body and cylinders
▲	▲	▲	Low SG bin extensions
▲	▲	▲	Bin pole lockout
			OTHER
●	●	●	Automatic Traction Control (ATC)
●	●	●	Wet disc brakes
●	●	▲	29.5 R 25 Radial Earthmover tyres
▲	▲	●	875/65 R 29 Radial Earthmover tyres
●	●	●	Remote grease banks
▲	▲	●	Automatic greasing
●	●	●	Onboard weighing
▲	▲	▲	Load lights: stack
▲	▲	●	Comfort ride suspension (front)
▲	▲	▲	Comfort ride suspension (rear)
▲	▲	▲	Reverse camera
●	●	●	Hand rails
▲	▲	▲	HSE Hand rails
●	●	●	Cab peak
▲	▲	▲	High pressure hydraulic filter
▲	▲	▲	Fuel heater
●	●	●	Belly plate
▲	▲	▲	Belly covers
▲	▲	▲	Remote transmission filters
●	●	●	Engine and transmission remote drain-gravity
▲	▲	▲	Engine and transmission remote drain-scavenge
▲	▲	▲	Window smash button
●	●	●	High visibility mirrors
●	●	●	Fleetm@tic® Classic package for 2 years
●	●	●	Electronic bonnet opening