

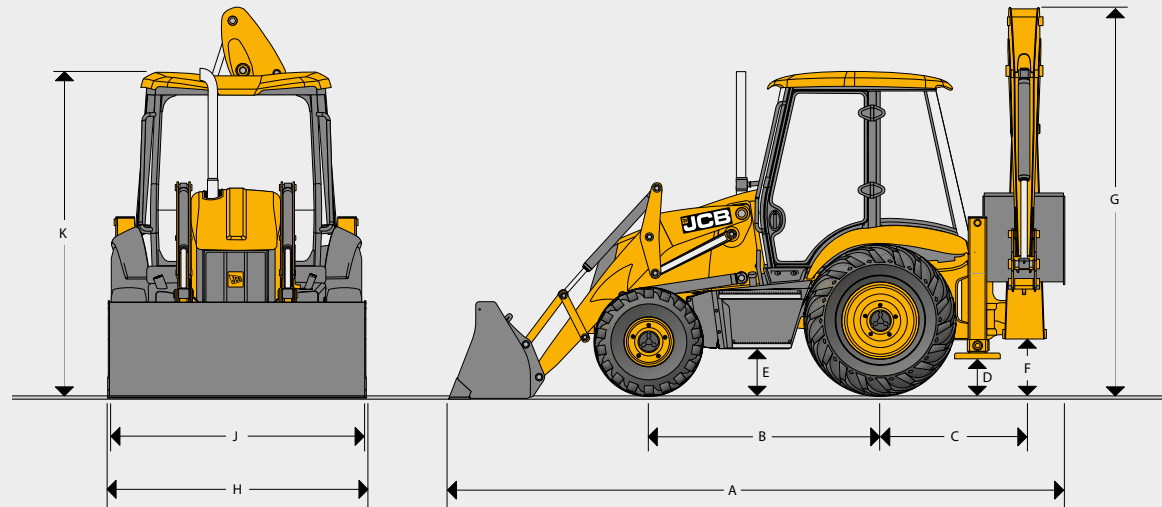
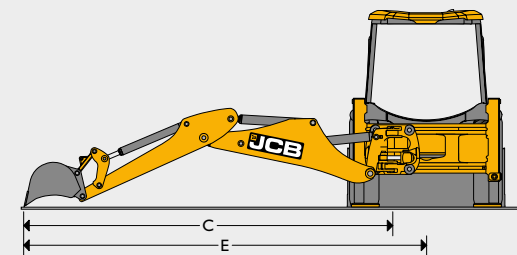


STATIC DIMENSIONS

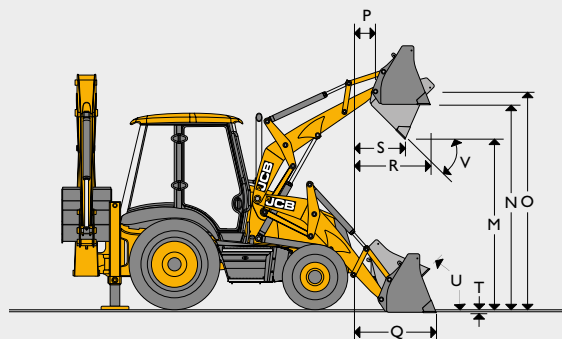

			3CX		3CX PLUS		3CX PRO	
Model			Sideshift	Centremount	Sideshift	Centremount	Sideshift	Centremount
A	Total travel length	m	5.90	7.19	5.96	7.19	5.90	7.19
B	Wheelbase	m	2.25	2.35	2.25	2.35	2.25	2.35
C	Slew centre to rear axle centre	m	1.32	1.32	1.32	1.32	1.32	1.32
D	Minimum ground clearance (stabiliser foot clearance)	m	0.31	0.32	0.31	0.32	0.31	0.32
E	Ground clearance – mainframe		0.50	0.46	0.50	0.46	0.50	0.46
F	Slew ground clearance	m	0.53	0.51	0.53	0.51	0.53	0.51
G	Total travel clearance	m	3.61	3.43	3.61	3.43	3.61	3.43
H	Shovel width	m	2.35 (GP shovel)	2.35 (GP shovel)	2.23 (6-in-1 shovel) / 2.35 (GP shovel)	2.23 (6-in-1 shovel) / 2.35 (GP shovel)	2.23 (6-in-1 shovel) / 2.35 (GP shovel)	2.23 (6-in-1 shovel) / 2.35 (GP shovel)
J	Rear frame width	m	2.24	2.24	2.24	2.24	2.24	2.24
K	Cab roof height	m	2.88	2.88	2.88	2.88	2.88	2.88

EXCAVATOR/LOADER PERFORMANCE

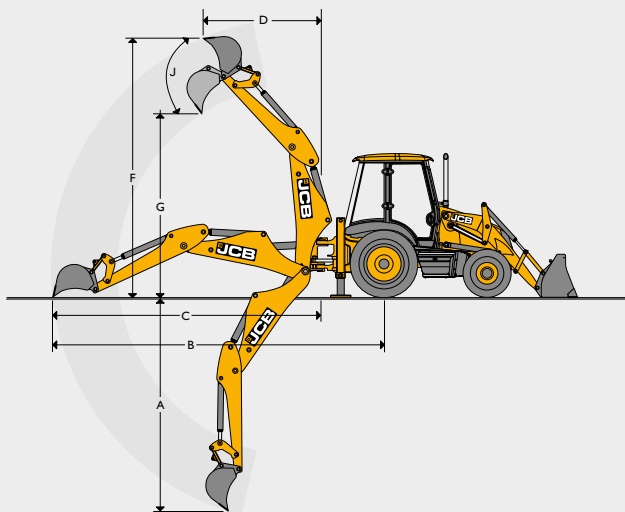

		3CX		3CX PLUS				3CX PRO				
Model		Sideshift	Centremount	Sideshift	Centremount	Extradig		Sideshift	Centremount	Extradig		
Dipper		Fixed	Fixed	Fixed	Fixed	Retracted	Extended	Fixed	Fixed	Retracted	Extended	
Excavator performance												
A	Max dig depth	m	4.29	4.29	4.29	4.29	4.45	5.65	4.29	4.29	4.45	5.65
B	Reach-ground level to rear wheel centre	m	6.67	6.67	6.67	6.67	6.96	8.16	6.67	6.67	6.96	8.16
C	Reach-ground level to slew centre	m	5.33	5.32	5.33	5.32	5.41	6.61	5.33	5.32	5.41	6.61
D	Reach at full height to slew centre	m	1.94	1.94	1.94	1.94	2.31	3.51	1.94	1.94	2.31	3.51
E	Side reach to centre line of machine	m	5.85	5.85	5.85	5.85	5.57	6.77	5.85	5.85	5.57	6.77
F	Max. working height	m	5.23	5.23	5.23	5.23	5.24	6.44	5.23	5.23	5.24	6.44
G	Max. load over height	m	3.57	3.57	3.57	3.57	3.10	4.3	3.57	3.57	3.10	4.3
J	Bucket rotation – power	degrees	203°	203°	203°	203°	203°	203°	203°	203°	203°	203°
Loader performance												
M	Dump height	m	2.91		2.91				2.91			
N	Load over height	m	3.35		3.35				3.35			
O	Pin height	m	3.59		3.59				3.59			
P	Pin forward reach	m	0.43		0.43				0.43			
Q	Reach at ground	m	1.43		1.43				1.43			
R	Max. reach at full height	m	1.25		1.25				1.25			
S	Reach at full height – bucket dumped	m	0.89		0.89				0.89			
T	Below ground level dig depth	m	0.06		0.06				0.06			
U	Rollback at ground	degrees	45°		45°				45°			
V	Dump angle	degrees	39°		39°				39°			
	Shovel breakout force	kgf	6219 (GP shovel) 6010 (6-in-I shovel)									
	Shovel capacity		1.0m³ (6-in-I shovel) / 1.1m³ (GP shovel)									
	Lift capacity to full height	kg	3495									

SPECIFICATION

3CX/3CX PLUS/3CX PRO BACKHOE LOADER

ENGINE			
	3CX	3CX PLUS	3CX PRO
Model	JCB 448, 4 cylinder, water cooled, diesel, naturally aspirated	JCB 444, Turbocharged, 4 cylinder, water cooled, diesel	JCB 444, Turbocharged, 4 cylinder, water cooled, diesel
No. of cylinders	4	4	4
Displacement	4.8 litres	4.4 litres	4.4 litres
Gross power	56kW (76hp) @ 2200rpm	68.6 kW (92hp) @ 2200rpm	68.6 kW (92hp) @ 2200rpm
Max torque	305Nm @ 1100rpm	408Nm @ 1200rpm	408Nm @ 1200rpm

Auto stop as standard automatically shuts off the engine when idle after 6 minutes, saving on wear and tear and also reducing fuel usage.

Auto idle reduces fuel consumption and unnecessary wear and tear by automatically reducing engine rpm to low idle after a preset time if no hydraulic services are active.

ECO/Power modes adjusts throttle speeds to reduce fuel consumption by up to 24%.


SERVICE CAPACITIES			
	3CX	3CX PLUS/3CX PRO	3CX/3CX PLUS/3CX PRO
	Sideshift	Sideshift	Centremount
Cooling system	ltr 20	20	20
Fuel tank	ltr 130	130	130
Engine oil with filter	ltr 15	20	20
Gearbox with filter	ltr 20	20	20
Rear axle	ltr 20	20	20
Front axle	ltr 20	20	20
Hydraulic system incl. tank	ltr 120	120	120

TRANSMISSION			
	3CX	3CX PLUS	3CX PRO
Manufacturer	JCB	JCB	JCB
Type	EasyShift	EasyShift	EasyShift
Gears forward/reverse	4 forward / 4 reverse	4 forward / 4 reverse	4 forward / 4 reverse
Shuttle control – F/R	Power shuttle / FNR	Power shuttle / FNR	Power shuttle / FNR
Travel speeds*	kph	kph	kph
Gear 1	5.7	5.7	5.7
Gear 2	11.7	11.7	11.7
Gear 3	22.0	22.0	22.0
Gear 4	37.0	40.0	40.0

- Torque convertor stall ratio is 2.52:1 (4WD).
- JCB EasyShift: Ease of operation for better productivity with effortless gear shift.
- Easy to use, low effort column mounted electric gear change.
- FNR switch on loader lever for easy direction change, without removing hand from loader lever.
- On-the-move gear changes are possible.
- Semi automatic kick down button on floor. While loading in second gear, operator can shift to first gear with push of a button, and automatically shift to second gear as soon as reverse gear is engaged.
- Gear indicator shown digitally on front display console.

*Speeds may vary dependant on tyre selection.

TURNING CIRCLE



* Standard bucket in travel position

Inner wheels braked

	4WD
A Outside loader bucket	4.89m
B Outside wheels	3.60m

Inner wheels not braked

A Outside loader bucket	5.45m
B Outside wheels	4.16m

STEERING

Front wheel full power hydrostatic system utilising a dedicated circuit. In the event of engine failure, emergency steering is maintained (all models).

BRAKES

Service: Hydraulically actuated dual line, self adjusting, oil immersed, multi-disc type on the rear axle, well protected from dirt, water etc. requiring no maintenance.

Parking: Hand operated, disc brake on rear axle input disc.

Brake pedal: Two independently operable foot pedals enable machine to manoeuvre in tight spaces. Pedals are linked together for normal use.

2WD / 4WD: Electrical selection between 2WD / 4WD allows on-the-move changes.

CAB

Fully adjustable seat and soft touch steering wheel. 'Walk through' two door access. Seat belt, large convex rear view mirror, interior light front screen wiper, horn, hazard warning system, tool box. Instrumentation panel includes engine speed, engine hours, speedometer, fuel level, water temperature gauge and 12v connection. Audible and visual fault warning system for alternator charge, coolant temperature, engine oil pressure, blocked air filter, transmission oil pressure and temperature, and hand brake on. Air conditioning standard on 3CX PLUS and PRO. 2 x USB-A charging ports. Electronic throttle. Bluetooth radio standard.

AXLES

Rear: Drive axle rigidly mounted, incorporates JCB Max-Trac torque proportioning differential, driven by short propshaft from gear box.

Front: 4WD, Steer axle, centrally pivoted with oscillation angle of 16°.

ELECTRICAL AND INSTRUMENTATION

12 volt negative ground, utilising wiring and connectors meeting IP69 water ingress test standard. Central fuse panel.

LiveLink standard on all models. Guide me home lights switches on the external lights for 30 seconds to assist operator to walk safely after parking machine.

Battery: 130 A/hr, 900 CCA. **Alternator:** 90 amp standard. **Front working lights:** 2 fixed.

Rear working lights: 2 fixed and 2 adjustable

1025 lumen LED worklights standard across all models. Auto stop. Auto idle.

TYRES (TUBED TYPE)

4WD

Front: 12.5x18-12 ply

Rear: 16.9x28-12 ply

OPERATING WEIGHT

Sideshift models: 3CX: 7660kg PLUS/PRO: 7800kg

Centremount models: 3CX: 8045kg PLUS/PRO: 8185kg

HYDRAULIC SYSTEM

3CX/3CX PLUS/3CX PRO

Pump Variable flow piston

Flow (lpm) 150

Pressure (Bar) 250