


B50E 6x6 45 000 L Articulated Water Truck

ENGINE Manufacturer Mercedes Benz (MTU) Model OM473LA (MTU 6R 1500) Configuration Inline 6, turbocharged and intercooled Net Power 430 kW (577 hp) @ 1 600 rpm Gross Torque 2 850 Nm (2 102 lbf) @ 1 300 rpm Displacement 15,6 litres (952 cu.in) Auxiliary Brake Jacobs Engine Brake® Fuel Tank Capacity 630 litres (166 US gal) Certification OM473LA (MTU 6R 1500) is EU Stage IIIA / EPA Tier 3 emission level equivalent	TRANSFER CASE Manufacturer Kessler Model W2400 Layout Remote mounted Gear Layout Three in-line helical gears Output Differential Interaxle 29/71 proportional differential. Automatic inter-axle differential lock.	WHEELS Type Radial Earthmover Type 875/65 R 29 (29.5 R 25 optional)	PNEUMATIC SYSTEM Air drier with heater and integral unloader valve, serving park brake and auxiliary functions System Pressure 810 kPa (117 psi)																								
TRANSMISSION Manufacturer Allison Model 4800 ORS Configuration Fully automatic planetary transmission Layout Engine mounted Gear Layout Constant meshing planetary gears, clutch operated Gears 7 Forward, 1 reverse Clutch Type Hydraulically operated multi-disc Control Type Electronic Torque Control Hydrodynamic with lock-up in all gears	AXLES Manufacturer Bell Model 30T Differential High input controlled traction differential with spiral bevel gears Final Drive Outboard heavy duty planetary on all axles	FRONT SUSPENSION Semi-independent, leading A-frame supported by hydro-pneumatic suspension struts Option: Electronically controlled adaptive suspension with ride height adjustment REAR SUSPENSION Pivoting walking beams with laminated rubber suspension blocks Option: Comfort Ride suspension walking beams, with two-stage sandwich block	ELECTRIC SYSTEM Voltage 24 V Battery Type Two AGM (Absorption Glass Mat) type Battery Capacity 2 X 75 Ah Alternator Rating 28V 80A																								
BRAKING SYSTEM Service Brake Dual circuit, full hydraulic actuation wet disc brakes on front and middle axles. Wet brake oil is circulated through a filtration and cooling system. Maximum brake force: 458 kN (102 962 lbf) Park & Emergency Spring applied, air released driveline mounted disc Maximum brake force: 215.5 kN (48 446 lbf) Auxiliary Brake Jacobs Engine Brake®. Automatic retardation through electronic activation of wet brake system. Total Retardation Power Continuous: 546 kW (732 hp) Maximum: 963 kW (1 291 hp)	HYDRAULIC SYSTEM Full load sensing system serving the prioritised steering, body tipping and brake functions. A ground-driven, load sensing emergency steering pump is integrated into the main system. Pump Type Variable displacement load sensing piston Flow 330 L/min (87 gal/min) Pressure 315 bar (4 569 psi) Filter 5 microns	MAX VEHICLE SPEED <table border="1"> <tr><td>1st</td><td>4 km/h</td><td>2,5 mph</td></tr> <tr><td>2nd</td><td>9 km/h</td><td>6 mph</td></tr> <tr><td>3rd</td><td>17 km/h</td><td>11 mph</td></tr> <tr><td>4th</td><td>23 km/h</td><td>14 mph</td></tr> <tr><td>5th</td><td>33 km/h</td><td>21 mph</td></tr> <tr><td>6th</td><td>44 km/h</td><td>27,3 mph</td></tr> <tr><td>7th</td><td>51 km/h</td><td>32 mph</td></tr> <tr><td>R</td><td>7 km/h</td><td>4 mph</td></tr> </table>	1st	4 km/h	2,5 mph	2nd	9 km/h	6 mph	3rd	17 km/h	11 mph	4th	23 km/h	14 mph	5th	33 km/h	21 mph	6th	44 km/h	27,3 mph	7th	51 km/h	32 mph	R	7 km/h	4 mph	WATER TANK Tank capacity 45 000 Litres
1st	4 km/h	2,5 mph																									
2nd	9 km/h	6 mph																									
3rd	17 km/h	11 mph																									
4th	23 km/h	14 mph																									
5th	33 km/h	21 mph																									
6th	44 km/h	27,3 mph																									
7th	51 km/h	32 mph																									
R	7 km/h	4 mph																									
			WATER TANKER PLUMBING Centrifugal water pump Rate of Flow 5 400 L/min Head 70 m																								
			CAB ROPS/FOPS certified 76 dBA internal sound level measured according to ISO 6396																								

Load Capacity & Ground Pressure

OPERATING WEIGHTS		GROUND PRESSURE		LOAD CAPACITY	
UNLADEN		LADEN (No sinkage/Total Contact Area Method)			
	kg (lb)	875/65 R29	kPa (Psi)		
Total	38 287 (84 408)	Front	297 (43,1)	Rated Payload	45 000 litres (11 900 gallons)
		Middle/Rear	366 (53,1)		
LADEN					
	kg (lb)	29.5 R 25	kPa (Psi)		
Front	24 034 (52 986)	Front	339 (49,2)		
Middle	29 879 (65 872)	Middle	381 (55,3)		
Rear	29 774 (65 640)				
Total	83 687 (184 498)				

Dimensions


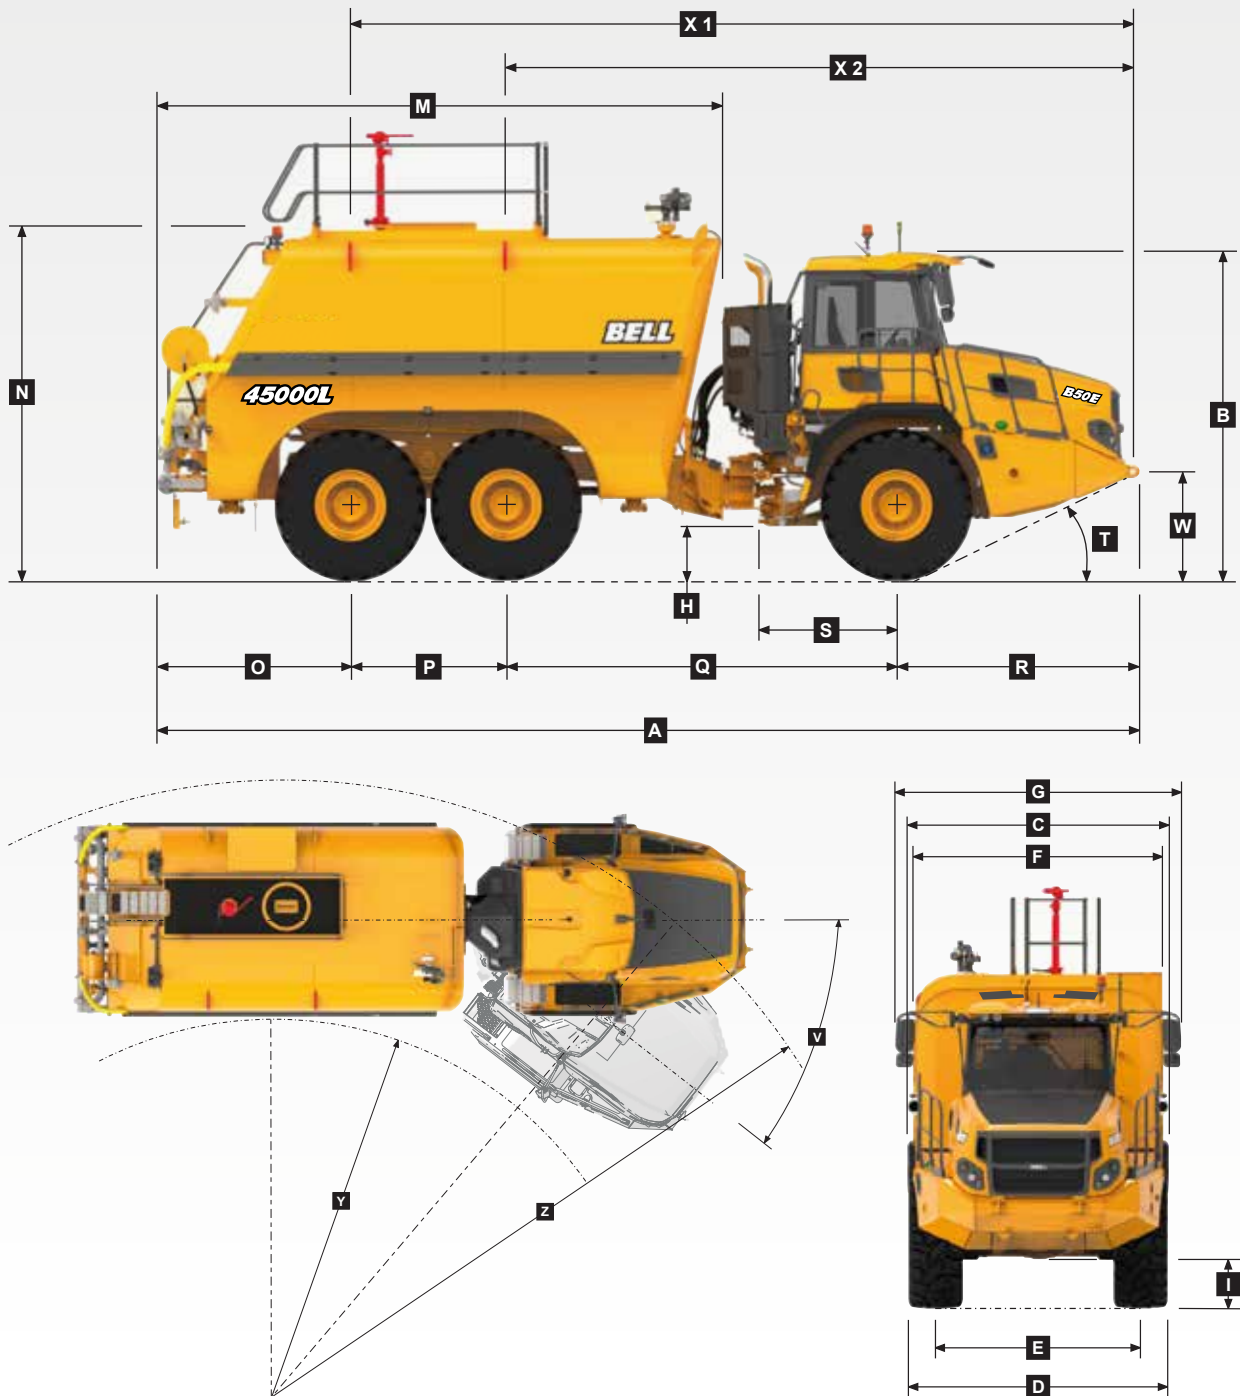


Machine Dimensions

A	Length - Transport Position	12 279 mm	(40 ft. 3 in.)	O	Rear Axle Centre to Bowser / Tank Rear	2 543 mm	(8 ft. 4 in.)
B	Height - Transport Position	3 820 mm	(12 ft. 6 in.)	P	Mid Axle Centre to Rear Axle Centre	1 950 mm	(6 ft. 5 in.)
C	Width over Mudguards	3 790 mm	(12 ft. 5 in.)	Q	Mid Axle Centre to Front Axle Centre	4 438 mm	(14 ft. 7 in.)
D	Width over Tyres - 875/65 R29	3 832 mm	(12 ft. 7 in.)	R	Front Axle Centre to Machine Front	3 351 mm	(11 ft. 0 in.)
D	Tyre Track Width - 29.5R25	3 714 mm	(12 ft. 2 in.)	S	Front Axle Centre to Artic Centre	1 558 mm	(5 ft. 1 in.)
E	Tyre Track Width - 875/65 R29	2 949 mm	(9 ft. 8 in.)	T	Approach Angle	23°	
E	Tyre Track Width - 29.5R25	2 952 mm	(9 ft. 8 in.)	V	Maximum Articulation Angle	42°	
F	Width over Tank / Bowser	3 699 mm	(12 ft. 2 in.)	W	Front Tie Down Height	1 269 mm	(4 ft. 2 in.)
F	Width over Tank / Bowser (with hose)	3 849 mm	(12 ft. 8 in.)	X1	Tank Lifting Centres	10 218 mm	(33 ft. 6 in.)
G	Width over Mirrors - Operating Position	4 027 mm	(13 ft. 3 in.)	X2	Front Lifting Centres to Tank Lifting Centre	7 310 mm	(24 ft. 0 in.)
H	Ground Clearance - Artic	558 mm	(1 ft. 9 in.)	Y	Inner Turning Circle Radius - 875/65 R29	4 694 mm	(15 ft. 5 in.)
I	Ground Clearance - Front Axle	555 mm	(1 ft. 9 in.)	Y	Inner Turning Circle Radius - 29.5R25	4 753 mm	(15 ft. 7 in.)
M	Tank / Bowser Length	6 877 mm	(22 ft. 7 in.)	Z	Outer Turning Circle Radius - 875/65 R29	9 408 mm	(30 ft. 10 in.)
N	Maximum Tank Height	4 137 mm	(13 ft. 7 in.)	Z	Outer Turning Circle Radius - 29.5R25	9 349 mm	(30 ft. 8 in.)



Gradeability/Rimpull

1. Determine tractive resistance by finding intersection of vehicle mass line and grade line. NOTE: 2% typical rolling resistance is already assumed in chart and grade line.
2. From this intersection, move straight right across charts until line intersects rimpull curve.
3. Read down from this point to determine maximum speed attained at that tractive resistance.

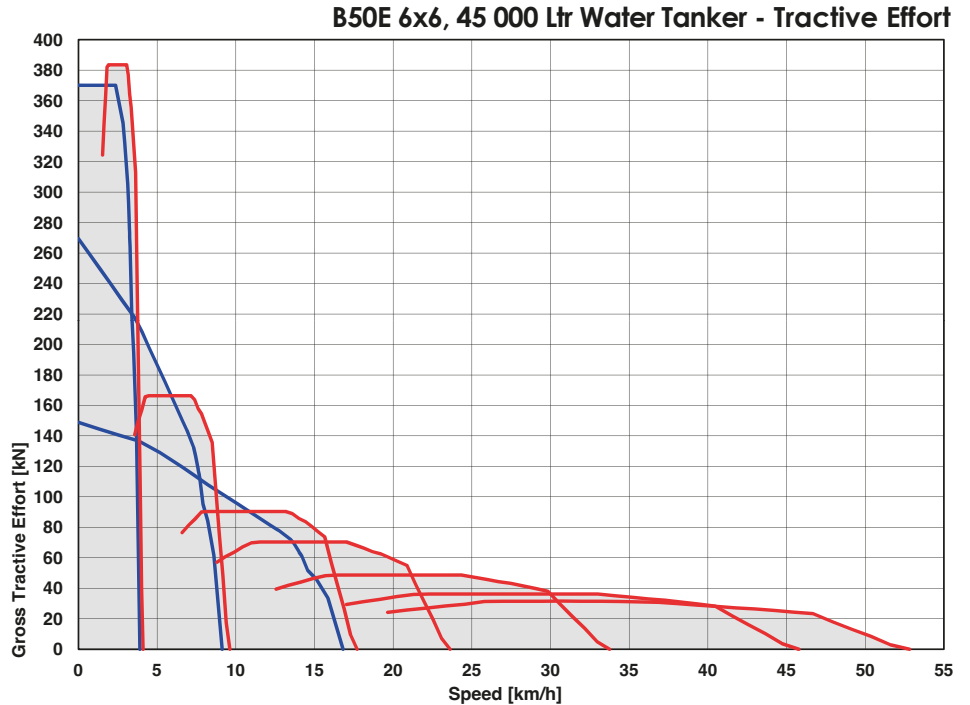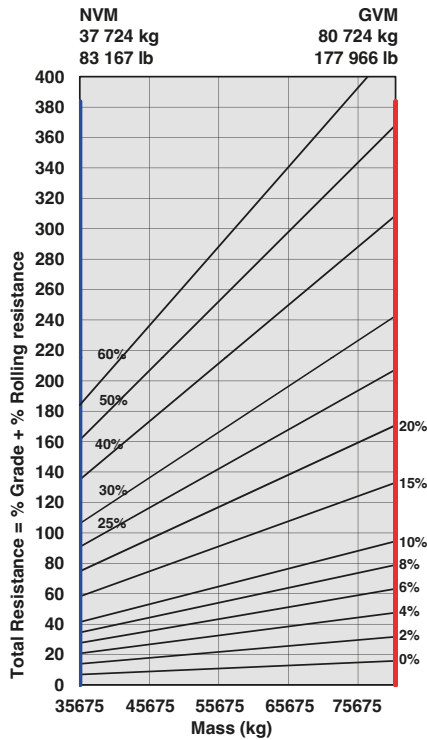

Retardation

1. Determine retardation force required by finding intersection of vehicle mass line.
2. From this intersection, move straight right across charts until line intersects the curve. NOTE: 2% typical rolling resistance is already assumed in chart.
3. Read down from this point to determine maximum speed.

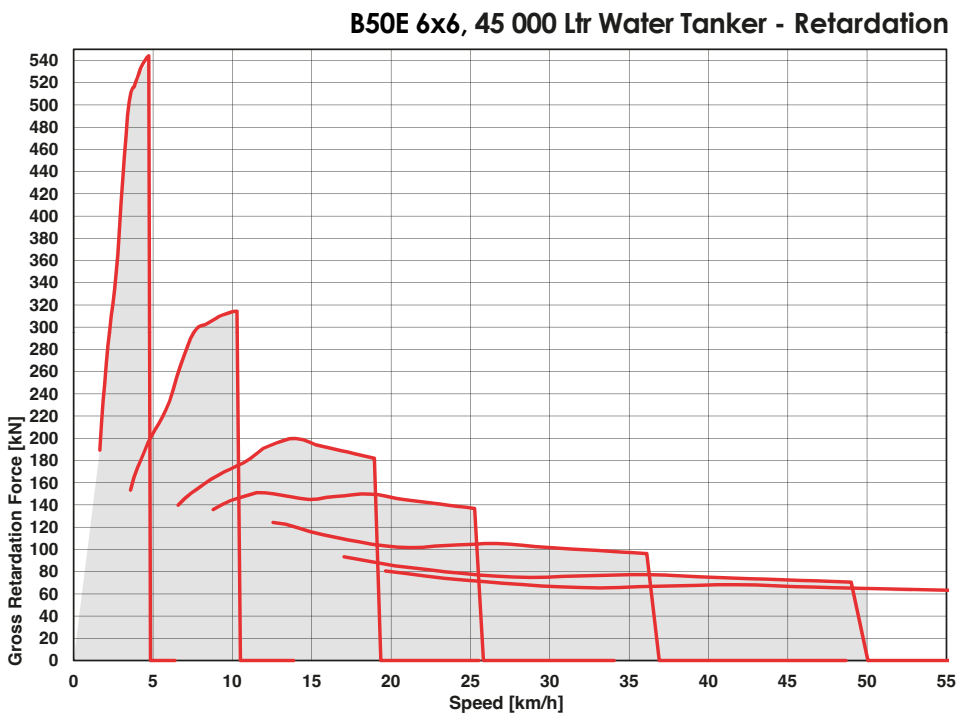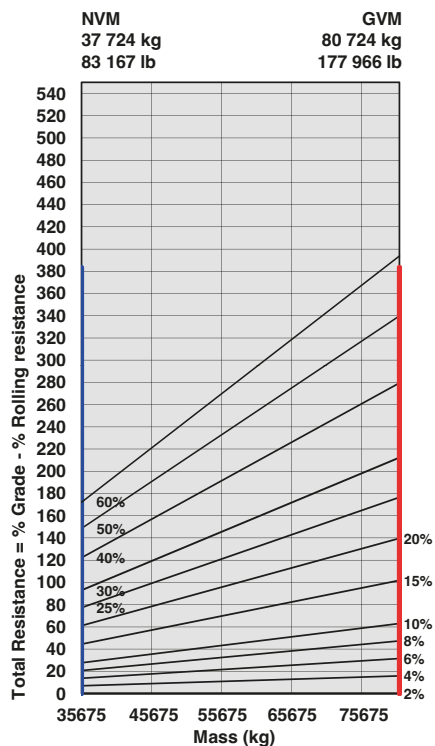



BATTER SPRAYS

- Two additional spray valves that expand the spray patterns reach on the sides of the tank
- Remotely activated from inside the cab



HOSE REEL

- 30m hose reel
- 1.5" adjustable fog/stream nozzle
- Spring retractable

DRIBBLE BAR

- Gravity fed dribble bar
- Remotely activated from inside the cab
- Even spread pattern covering the width of the vehicle



PENETRATION SPRAY BARS

- Available with nozzles or holes
- Remotely activated from inside the cab
- Pressurised by the pump to create a jet of water



REMOTE WATER CANNON

- Adjustable fog/stream pattern
- A variety of flow settings between 250 and 700 GPM
- Remotely controlled via a joystick inside the cab
- High quality components built to last in heavy duty applications

MANUAL WATER CANNON

- Long range spray nozzle
- High quality components built to last in heavy duty applications



16 000 L	18 000 L	23 000 L	27 000 L	35 000 L	38 000 L	45 000 L	
							ENGINE
●	●	●	●	●	●	●	Engine valve brake and exhaust brake
●	●	●	●	●	●	●	Dual element air cleaner with dust ejector valve
●	●	●	●	●	●	●	Precleaner with auto dust scavenging
●	●	●	●	●	●	●	Water separator
●	●	●	●	●	●	●	Serpentine drive belt with automatic tensioner
▲	▲	▲	▲	●	●	●	Provision for fast fill
▲	▲	▲	▲	●	●	●	Wet-sleeve cylinder liners
							COOLING
●	●	●	●	●	●	●	Crank-shaft mounted viscous-drive fan
●	●	●	●	●	●	●	Fan guard
							PNEUMATIC SYSTEM
●	●	●	●	●	●	●	Engine-mounted compressor
●	●	●	●	●	●	●	Air drier with heater
●	●	●	●	●	●	●	Integral unloader valve
							ELECTRICAL SYSTEM
●	●	●	●	●	●	●	Battery disconnect
●	●	●	●	●	●	●	Drive lights
●	●	●	●	●	●	●	Air horn
●	●	●	●	●	●	●	Reverse alarm
●	▲	▲	▲	▲	▲	▲	White noise reverse alarm
●	●	●	●	●	●	●	Rotating beacon
●	●	●	●	●	●	●	Pitch roll sensor
▲	▲	▲	▲	▲	▲	▲	LED drive lights
▲	▲	▲	▲	●	●	●	Halogen artic reverse light
▲	▲	▲	▲	▲	▲	▲	LED artic reverse light
●	●	●	●	●	●	●	LED reverse light
							STEERING SYSTEM
●	●	●	●	●	●	●	Uni-directional ground-driven secondary steering pump
▲	▲	▲	▲	▲	▲	▲	Bi-directional ground-driven secondary steering pump
							CAB
●	●	●	●	●	●	●	ROPS/FOPS certification
●	●	●	●	●	●	●	Tilt cab
●	●	●	●	●	●	●	Gas strut-supported door
●	●	●	●	●	●	●	HVAC Climate control system
●	●	●	●	●	●	●	AM/FM radio/CD player + USB
●	●	●	●	●	●	●	Rear window guard
●	●	●	●	●	●	●	Wiper/washer with intermittent control
●	●	●	●	●	●	●	Tilt and telescoping steering wheel
●	●	●	●	●	●	●	Centre-mount air-suspension seat
●	●	●	●	●	●	●	Halogen work lights
▲	▲	▲	▲	▲	▲	▲	LED work lights
▲	▲	▲	▲	▲	▲	▲	Rotating beacon: seat belt installation
▲	▲	▲	▲	▲	▲	▲	Remote engine and machine isolation
●	●	●	●	●	●	●	Remote battery jump start
●	●	▲	▲	●	●	●	High visibility mirrors
●	●	●	●	●	●	●	Retractable 3-point seat belt
●	●	●	●	●	●	●	Foldaway trainer seat with retractable seat belt
							CAB (continued)
●	●	●	●	●	●	●	12-volt power outlet
●	●	●	●	●	●	●	Cup holder
●	●	●	●	●	●	●	Cooled/heated lunch box
●	●	●	●	●	●	●	Utility bin (removable)
●	●	●	●	●	●	●	Manually adjustable mirrors
▲	▲	▲	▲	▲	▲	▲	Electric adjustable & heated mirrors
●	●	●	●	●	●	●	Deluxe 10" colour LCD: Speedometer / Fuel gauge / Transmission oil temperature gauge / Engine coolant temperature gauge / LED function/warning indicators and audible alarm / Transmission gear selection / Tachometer / Battery voltage / Hour meter / Odometer / Fuel consumption / Trip timer / Trip distance / Metric/English units / Service codes/diagnostics
●	●	●	●	●	●	●	Backlit sealed switch module functions with: Wiper control / Lights / Heated mirrors / Retarding aggressiveness / Transfer case differential lock / Transmission gear hold / Airconditioner/ Heater controls / Preselected Speed Control
●	●	●	●	●	●	●	Backlit Plumbing sealed switch module functions with: Battery / Spray / Pulse / Tank fill / Hose reel / Pump / Dribble bar
							PLUMBING
●	●	●	●	●	●	●	Dribble bar
●	●	●	●	●	●	●	1 800 lpm 50 m head pump
▲	▲	▲	▲	●	●	●	5 400 lpm 70 m head pump*
▲	▲	▲	▲	▲	▲	▲	Pressurised dribble bar system with nozzles
●	●	●	●	●	●	●	Spray valves (in-cab activation)
●	●	●	●	●	●	●	Batter spray valves
●	●	●	●	●	●	●	Fold down top rails
▲	▲	▲	▲	▲	▲	▲	Suction pipe for filling from dam
●	●	●	●	●	●	●	Step ladder access
▲	▲	▲	▲	▲	▲	▲	Inspection access
▲	▲	▲	▲	▲	▲	▲	Manual water canon
▲	▲	▲	▲	▲	▲	▲	Remote control water canon
▲	▲	▲	▲	▲	▲	▲	Hose reel
							OTHER
●	●	●	●	●	●	●	20.5 R 25 Radial earthmover tyres
▲	●	●	●	●	●	●	23.5 R 25 tyres
●	●	●	●	●	●	●	620/75 R26 tyres
●	●	●	●	●	●	▲	29.5 R 25 Radial Earthmover tyres
●	●	●	●	●	▲	●	875/65 R 29 Radial Earthmover tyres
●	●	●	●	●	●	●	Remote grease banks
▲	▲	▲	▲	▲	▲	▲	Automatic greasing
●	●	●	●	●	●	●	Cab peak
▲	▲	▲	▲	▲	▲	▲	High pressure hydraulic filter
▲	▲	▲	▲	▲	▲	▲	Fuel heater
●	●	●	●	●	●	●	Belly cover
▲	▲	▲	▲	▲	▲	▲	Handrails
▲	▲	▲	▲	▲	▲	▲	Remote transmission filter
●	▲	▲	▲	▲	▲	▲	Reverse camera

* (Option only): Larger centrifugal pump available if suction pipe option is not fitted.

FEATURES OF THE ARTICULATED WATER TRUCK

- **PRODUCTIVE:** Powerful built-for hauling ADT drivetrains are well matched for pulling and retarding heavy loads. Nitrogen over oil strut suspension smooths the ride for operator and machine.
- **ECONOMY:** Modern fuel efficient engine, lockup torque converter and planetary transmission deliver more work per unit of fuel used
 - **EASY TO OPERATE:** High quality cab is conducive to operator care. Simple to use controls and electronic interfaces protect the machine from accidental misuse.